

CAMARO™
LOC
FLOORING COLLECTION



DESIGN & FUNCTION. LOCKED IN

LVT LOC

WHY LOC

We understand that you want to spend less time installing and more time enjoying your new floor, without compromising on your requirements in terms of style and durability.

The Camaro Loc collection with its unique locking system includes a range of popular wood and stone designs influenced by today's home interior trends, all accurately reproduced to create flooring that is both beautiful and practical for a wide range of internal spaces.

To further enhance the authenticity of the Camaro Loc collection, each of the wood and stone designs come with a micro bevel effect on all four sides of the plank or tile, adding subtle depth and detailing to the overall appearance of the floor once laid.

DESIGN & FUNCTION. LOCKED IN

LOC IT LIVE IT



SO QUICK. SO EASY NO WAITING FOR ENTERTAINING

Drawing from our many years of vinyl flooring expertise, the Camaro Loc collection features interlocking planks and tiles that eliminate the need for adhesion, therefore reducing installation time by half.

This new range is designed specifically to fit in with your lifestyle, reducing disruption to today's modern household whilst offering a range of different styles from traditional, authentic woods to fresh, contemporary stone tiles.



UNIQUE LOCKING SYSTEM



LOC IT
LIVE IT

CAMARO™ LOC

FLOORING COLLECTION

FREE
Sample Service

Sample your choice of flooring before you buy and try it out in your home for free. We provide complimentary product samples to ensure you find the exact product you are looking for.


To order a free sample of any Camaro Loc colour, visit either www.polyflor.com or call the dedicated Polyflor Samples Hotline on +44 (0)161 767 2551.


Share your experience

View even more inspirational interiors and post your own photographs online at.

 [@PolyflorLtd](https://twitter.com/PolyflorLtd)

 [Facebook.com/PolyflorLtd](https://www.facebook.com/PolyflorLtd)

 blog.polyflorathome.com

 [polyflorathome](https://www.pinterest.com/polyflorathome)

LVT LOC

WOOD

Faithfully reproducing the detailing and natural beauty of wood planks, the realistic timber variations, grains and surface textures combined with accurately reproduced tones gives each plank in the Camaro Loc collection an authentic appearance.




SUMMER MAPLE



3429 SUMMER MAPLE

This fresh, coastal inspired timber design of Summer Maple will give your home a warm and inviting atmosphere. The slimmer planks with their elongated flowing grains and sunny tones marry beautifully with sleek modern or homely decors.

PLANK SIZE: 146 x 907mm

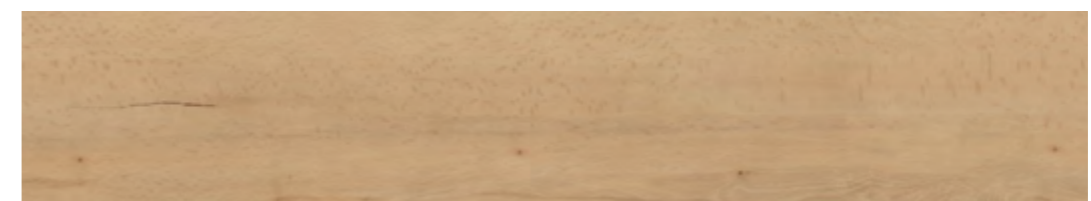

APPLE TREE



3431 APPLE TREE

The refined and sophisticated design of Apple Tree, with its warm honey tones and subtle grain patterns creates a calm and inviting backdrop for any interior décor scheme. Mix traditional florals with pastel shades or neon brights for a modern twist on a classic country cottage look.

PLANK SIZE: 146 x 907mm



EVERGREEN OAK



3442 EVERGREEN OAK

Creating a subtle effect, the understated wood grain of Evergreen Oak combined with pale golden hues and a smooth surface texture, provides an ideal backdrop for contemporary interiors combining authentic oak wood flooring with modern materials and textures.

PLANK SIZE: 177 x 1212mm



BUTTERNUT OAK



3443 BUTTERNUT OAK

The warmth and character associated with natural oak planks is realised in the strength and clarity of Butternut Oak. This contemporary flooring design can be laid in traditionally styled interiors, or why not combine it with modern fixtures for a sophisticated effect.

PLANK SIZE: 177 x 1212mm



RICH VALLEY OAK




3432 RICH VALLEY OAK

Characterised by a variety of even honey tones, the traditional design of Rich Valley Oak will complement a variety of interior colour schemes, whilst bringing a touch of class to your home. The slimmer plank size is ideal for smaller rooms such as hallways.

Featured with Classic Yorkstone

PLANK SIZE: 146 x 907mm

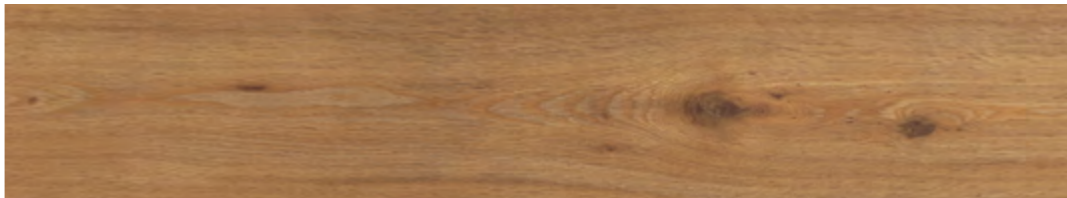

HICKORY OAK



3439 HICKORY OAK

The distinctive knots and graining of rustic oak have been expertly captured in this Hickory Oak plank design. The understated elegance of this accomplished timber will offset strong statement furniture with ease, whilst appearing fresh and inviting.

PLANK SIZE: 177 x 1212mm



VINTAGE TIMBER



3446 VINTAGE TIMBER

Vintage Timber has an exciting and expressive character, providing a striking base for any room and a wide range of interior styles. The authentic surface emboss integrates well with accompanying fabrics and furniture textures.

PLANK SIZE: 146 x 907mm




LAUREL DARK OAK



3436 LAUREL DARK OAK

The rich wood tones found in Laurel Dark Oak are the ideal choice for timeless design schemes that will look fantastic for years to come. Combine with warm furnishings, textiles and bright pop colours for a fresh contemporary ambiance.

PLANK SIZE: 177 x 1212mm

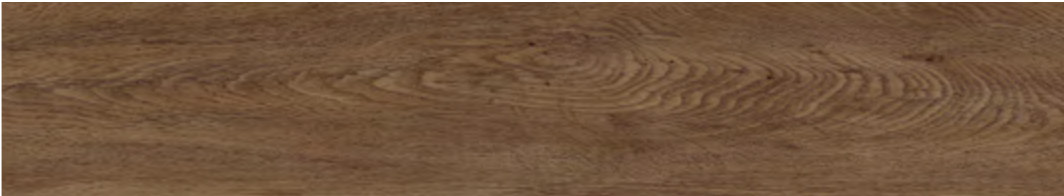

SMOKE LIMED OAK



3437 SMOKE LIMED OAK

The true natural beauty of grey oak planks has swiftly become a classic design. Blurring the lines between old and new has never been more stylish, evoked in the large plank and authentic grain of Smoke Limed Oak.

PLANK SIZE: 177 x 1212mm



WHITE LIMED OAK



3441 WHITE LIMED OAK

The detail and realism of this floor design not only looks amazing but is also practical and durable. The subtle tones and strongly marked variation in White Limed Oak can also be emphasised by pairing up with other wood plank designs.

Featured with Grey Mountain Ash

PLANK SIZE: 146 x 907mm



TAN LIMED OAK



3438 TAN LIMED OAK

Effortlessly beautiful this distinctive weathered wood with its warming brown tones and highlights will give any room a classic finish. Tan Limed Oak features authentically reproduced wood grains and knots, whilst giving you the durability of vinyl flooring.

PLANK SIZE: 177 x 1212mm




GREY MOUNTAIN ASH



3427 GREY MOUNTAIN ASH

The cool tones and modern design of Grey Mountain Ash is the perfect accompaniment to contemporary interiors. Combine this slimmer plank design with rich brights or monochrome tones for a striking impact.

PLANK SIZE: 146 x 907mm

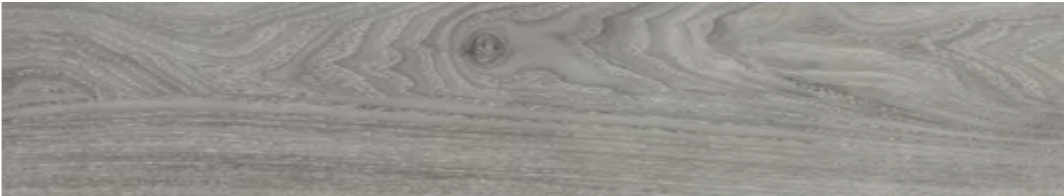

LVT
LOC

STONE

Expertly combining the natural textures, tonal variations and depth of character found in rock formations, the Camaro Loc collection of stone finishes evokes a sense of luxury that will bring any home interior to life.



CLASSIC YORKSTONE



3455 CLASSIC YORKSTONE

The structure of Classic Yorkstone features a variety of minerals and veining, which are authentically replicated here using subtle and warm tones. This classic tile is ideal for more traditional home interiors and can be combined with other classic flooring including wood.

Featured with Summer Maple

TILE SIZE: 298 x 603mm



GREY FLAGSTONE



3452 GREY FLAGSTONE

The cool grey and subtle metallic undertones in these sleek Grey Flagstone tiles look great in fresh, modern interiors, laid in a traditional brickwork design.

TILE SIZE: 298 x 603mm



BLACK SHADOW SLATE



3453 BLACK SHADOW SLATE

Slate designs continue to be a firm favourite within home interiors, and with Black Shadow Slate it's easy to see why. The subtle movements and tonal variations in the tiles design creates depth and authentic textures, whilst the colour blends beautifully with other flooring materials and interior styles.

Featured with Grey Flagstone

TILE SIZE: 298 x 603mm



LVT
LOC

THE COLLECTION

The Camaro Loc collection has been developed with today's home interior trends in mind, encompasses a wide range of natural designs to suit a host of interior spaces. Whether you are creating a traditional, classic interior or a bright modern space, the choice of Camaro Loc floor coverings offers inspiration and brings an authentic, natural beauty to your home.




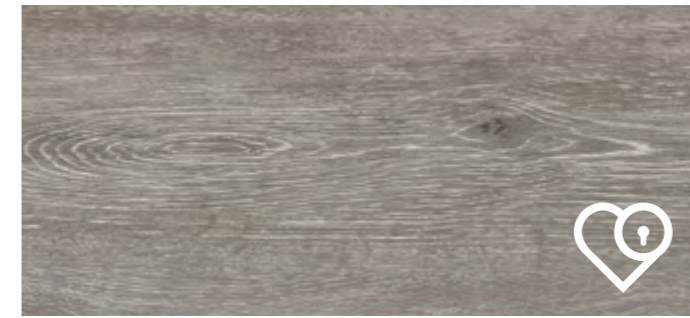
THE COLLECTION



3429 SUMMER MAPLE 146 x 907mm  




3431 APPLE TREE 146 x 907mm  



3437 SMOKE LIMED OAK 177 x 1212mm  



3441 WHITE LIMED OAK 146 x 907mm  




3442 EVERGREEN OAK 177 x 1212mm  




3443 BUTTERNUT OAK 177 x 1212mm  




3438 TAN LIMED OAK 177 x 1212mm  

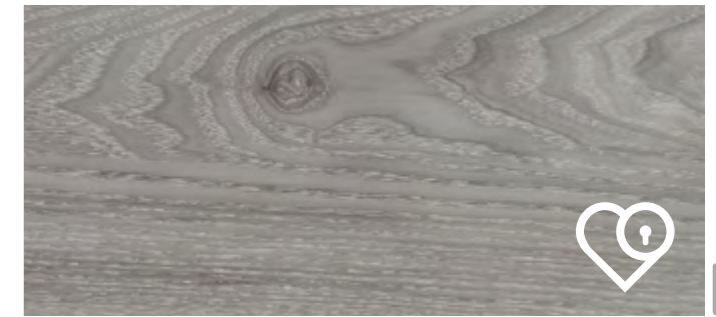

3427 GREY MOUNTAIN ASH 146 x 907mm  

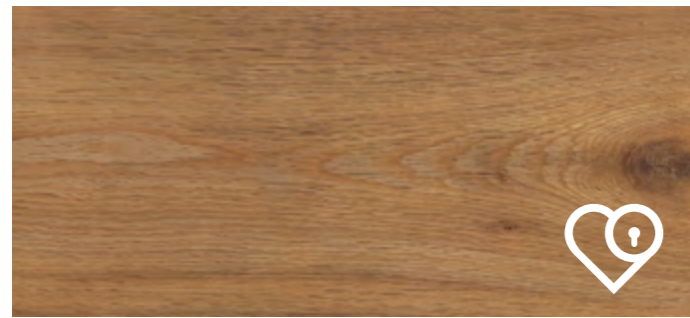

3432 RICH VALLEY OAK 146 x 907mm  



3439 HICKORY OAK 177 x 1212mm  




3452 GREY FLAGSTONE 298 x 603mm  




3455 CLASSIC YORKSTONE 298 x 603mm  



3446 VINTAGE TIMBER 146 x 907mm  

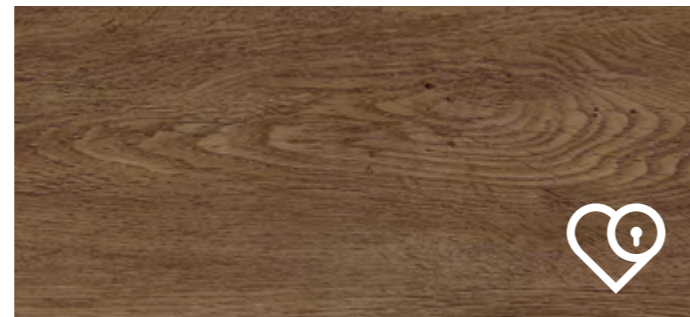

3436 LAUREL DARK OAK 177 x 1212mm  

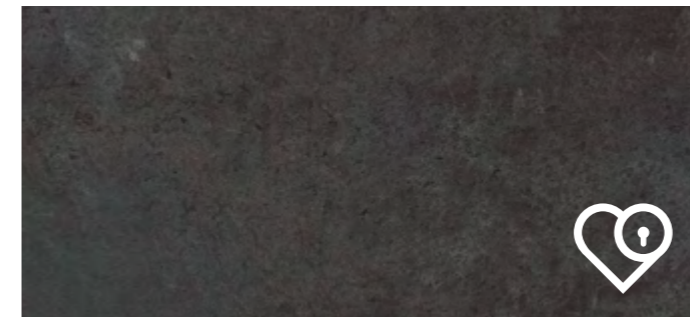

3453 BLACK SHADOW SLATE 298 x 603mm  

FREE Sample Service

It's worth remembering that if you see a colour you like you can order a free sample through our dedicated samples department at polyflor.com/samples or on +44 (0)161 767 2551

 Micro bevel

With regard to colour printing, it is only possible to give a provisional representation of the colour. For colour selection, an original sample should be used which we shall be pleased to supply. The stone effect tiles may include variation in markings to replicate the natural material and the wood effect products may contain knots or markings.

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Expona Control PUR or the Polysafe ranges.

FLOORCARE

We want your new Camaro Loc floor to continue to look as good as the first day it was installed, so to help you achieve this we have included the following floorcare guidelines. Each product in the Camaro Loc collection features a polyurethane surface treatment providing protection against everyday wear, ensuring optimum long-term performance of your floor.

Initial cleaning after your new floor has been installed:

- Sweep or vacuum to prevent loose dirt or grit from scratching the floor.
- Polishing your floor can be beneficial to help prevent slight surface scratches and to provide further protection.

Day to day cleaning:

- Sweep or vacuum the floor to remove loose dirt, grit or dust.
- Use clean mops and neutral cleaning solutions to regularly clean your floor. Contact Polyflor for details of approved maintenance products.
- Dilute the floor cleanser to the manufacturer's instructions.
- Mop the floor evenly.
- Collect any excess liquid in a mop bucket.
- Rinse the floor with clean water and allow to dry.

Regular cleaning is more beneficial to the floorcovering and is more cost effective than occasional heavy cleaning.

- Do:**
- ✓ Install barrier mats at entrances to pick up grit and moisture (Note, some rubber-backed mats may discolour the floor).
 - ✓ Ensure your furniture is fitted with protective pads where necessary to prevent scratches.
 - ✓ Use protective cups under heavy furniture to prevent indentation.
 - ✓ Remove spillages as quickly as possible to reduce risk of staining and causing slip hazards.
 - ✓ Always use clean equipment when maintaining your floor.
 - ✓ Regularly trim pets claws as these can cause fine scratches.

- Don't:**
- ✗ Use abrasive liquids or metal scouring pads as these can damage the floor.
 - ✗ Clean the floor with solvents, caustic detergents, washing up liquids, soap powders, bleach, furniture polishes, petroleum based products, pine gels, stain removers or highly coloured products. Such products may make the floor slippery or cause permanent damage.
 - ✗ Drag furniture with unprotected feet across the floor.

GUARANTEE

10 Year Product Guarantee

The Camaro Loc collection of interlocking vinyl tiles has been developed to meet the highest technical specification of its type. Ideal for all areas of the home, the products ensure high performance and optimum style. In addition, Camaro Loc is suitable for moderate commercial applications such as light traffic areas within hotels, conference rooms and small offices. Compared with many natural flooring options, Camaro Loc will under normal conditions resist household stains, will not crack, chip or splinter. The manufacturers of Camaro Loc are confident that their high quality products will provide many years of valuable service. All products purchased from the range are guaranteed for 10 years against normal wear and tear in the recommended environment, provided that they have been fitted correctly by a professional flooring installer and maintained in accordance with the manufacturer's instructions. Full terms and conditions of the guarantee are available on request from your flooring wholesaler or Polyflor Ltd.



If you require any further information please contact Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com.



TECHNICAL SPECIFICATION

Characteristics	Standards	CAMARO LOC
General performance	EN 649 / EN ISO 10582	Heterogeneous, PVC
Total weight	EN 430 / EN ISO 23997	7,025 g/m ²
Performance classification	EN 685 / EN ISO 10874	23 / 31
Gauge	EN 428 / EN ISO 24346	4.0mm
Wear Layer	EN 429 / EN ISO 24340	0.3mm
Packaging and plank sizes (excluding tongue & groove)	EN 427 / EN ISO 24342	15 @ 145.6 x 906.6mm = 1.98m ² 9 @ 177.4 x 1212.4mm = 1.94m ²
Packaging and tile sizes (excluding tongue & groove)	EN 427 / EN ISO 24342	11 @ 298.0 x 602.8mm = 1.98m ²
Surface Treatment		PU
Residual indentation	EN 433 / EN ISO 24343-1	≤0.05mm
Abrasion resistance	EN 649 EN ISO 10582	Group T Type I
Dimensional stability	EN 434 / EN ISO 23999	≤0.1%
Colour fastness to artificial light*	EN ISO 105-B02	level ≥ 6 method A
Behaviour to fire	EN 13501-1	Bfl - S1
Slip resistance**	EN 13893 DIN 51130 AS/NZS 4586	Class DS (dry condition) R10 R10
		For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges
Chemical resistance	EN 423 / EN ISO 26987	***
Castor chair suitability	EN 425 / ISO 4918	yes, type W, EN 12 529
Underfloor heating suitability	EN 1264-2	Suitable, max 27°C
Electrostatic properties when walked on	EN 1815	<2kV
VOC emissions	Indoor Air Comfort Gold AgBB	Eurofins certified product Very low emissions
Responsible Sourcing	BES 6001 SA 8000	Very Good Approved Factory
Environmentally preferable flooring		Polyflor Camaro Loc achieves a BRE Global Environmental A+ rating Camaro Loc is 100% recyclable and contains average 40% recycled material Recyclable via the Recofloor scheme. Visit www.polyflor.com/environment
Applications		Camaro Loc is ideally suited for all residential interiors as well as moderate commercial areas

* We recommend that adequate UV protection be taken against products being installed in direct sunlight as fading may occur.

** For clarification regarding slip resistance, consult Polyflor.

*** Resistant depending on concentration and time of exposure. In case of increased impact of oils, grease, acids, alkalis and other aggressive chemicals, please contact us.

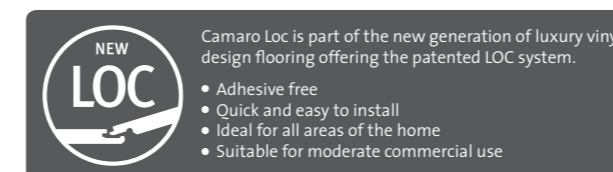


FIRST CLASS INSTALLATION

To ensure your new floorcovering continues to perform year after year, together with our floorcare guidelines on page 44 we also recommend that all our Camaro Loc designs are fitted by a professional flooring installer, over a suitable interlocking vinyl flooring underlay such as **Polyflor's Vinyl Loc Underlay**. Designed to prevent the planks sliding or becoming damaged due to uneven subfloors, our **Vinyl Loc Underlay** also acts as a shock-absorber when walked across and reduces the impact sound transmitted through neighbouring rooms. It is also suitable for use over underfloor heating due to its low thermal resistance, giving you a floorcovering that is stable, even, quiet and comfortable for your whole family to walk on.




Professional flooring installation recommended

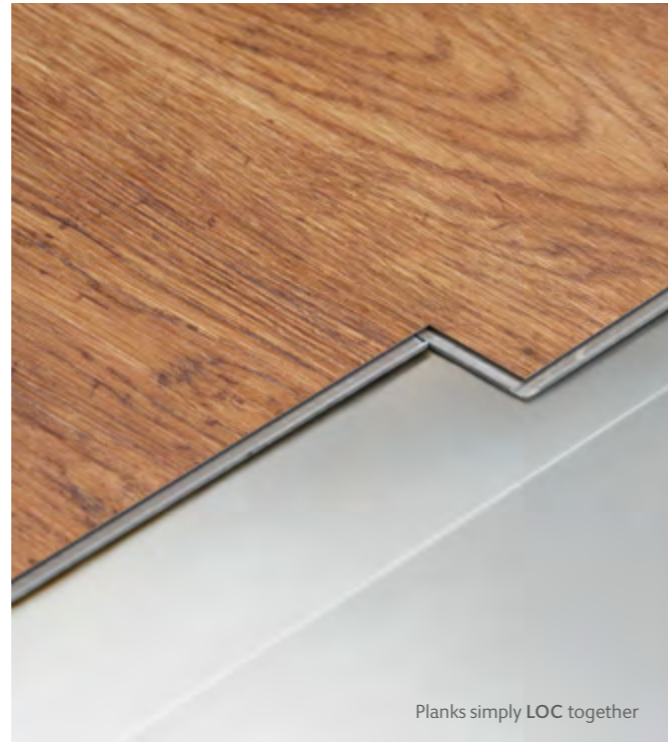

Planks simply LOC together



Vinyl LOC Underlay is supplied in a convenient box

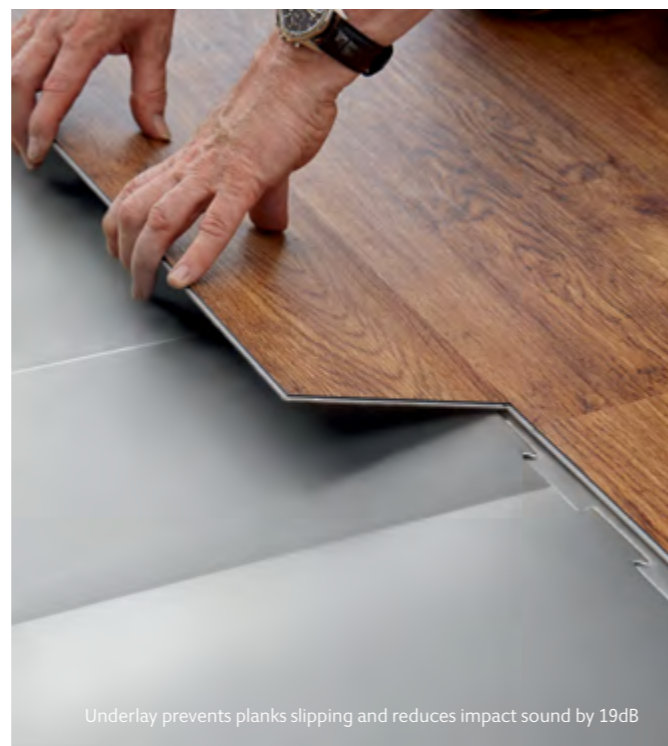

Underlay prevents planks slipping and reduces impact sound by 19dB

INSTALLATION GUIDE

GENERAL INFORMATION

When installing Camaro Loc always follow current standards for the installation of floorcoverings, also best current installation practice incorporating the latest technical developments should be employed.

The preparation of the subfloor, the installation of the floor-covering and the measures taken to safeguard value are key factors in ensuring optimum suitability and performance of resilient floorcoverings.

On receipt of materials, check that colours correspond to those ordered and that there is no damage or visual defects in the material.

In particular, check that the material is from one batch. Claims for visual defects can only be accepted prior to installation and cutting.

PREPARATION OF SUBFLOORS

Camaro Loc can be laid on mineral subfloors prepared in accordance with accepted trade standards. It must be clean, durable, permanently dry and flat. It can be laid directly on existing floor coverings of ceramic, vinyl and linoleum as long as they are clean, flat and there is no dampness under the floor-covering. It can be laid over wooden floors, floorboards and chipwood floors as long as they are flat, firmly fastened and free of protruding nails etc.

In the case of underfloor heating consult Polyflor for detailed instructions.

Joints in the subfloor must be evened out. The flooring can be laid on underlay with a slightly adhesive surface suitable for Camaro Loc.

Existing installed carpeting or needle-punched felt is unsuitable as a base for the installation of floating flooring. This will need to be removed first.

In installations where underfloor heating is used, current standards should be followed.

Maximum working temperature on the surface of the flooring is 27°C.

Residual moisture content:

Cement screed	max. 2.0 CM %
With underfloor heating	1.8 CM %
Anhydrite floor	max. 0.5 CM %
With underfloor heating	0.3 CM %

INSTALLATION

The parcels of flooring must be protected against dirt and moisture during storage and installation. The climatic conditions must be observed as follows:

Floor temperature	> 15°C
Room temperature	> 18°C
Relative humidity	< 50-60%

Prior to laying the floor, place the closed packages of material that is to be installed into the room in which it is to be installed for 48 hours so the material can acclimatise itself. The closed packages must not be stacked greater than 5 high.


COMPLETION WORK

The floor covering can be walked on directly after it is installed. Remove all the spacers and wedges. Edge expansion gaps should be covered using suitable skirting or scotia; when doing so, ensure that this is not fastened into the floor itself.

Install the suitable system profiles. Areas where the skirting and the profiles do not meet can be sealed off using permanently-joint compound.

INSTRUCTIONS

During storage and installation the room temperature should be 20°C (minimum 15°C) and have a relative humidity of 50-60%. In the event of extended deviations from the aforementioned room conditions (< 30% or > 80% for relative humidity or temperatures of < 10°C or > 30°C) a change in the dimensions, gap formation, etc is a typical characteristic for this kind of product.

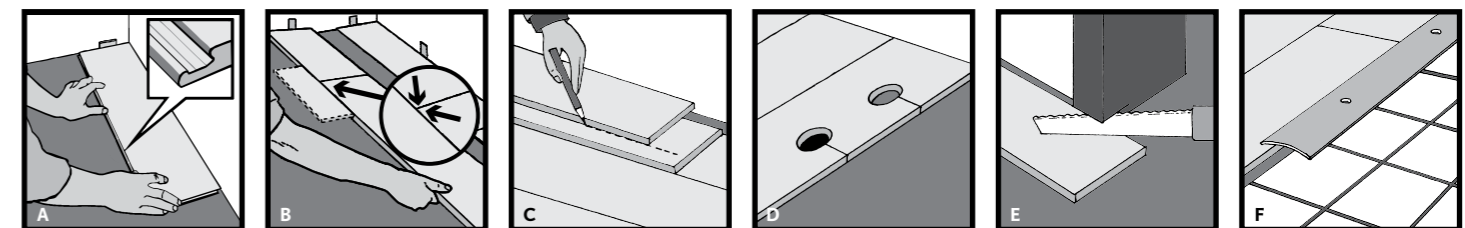

A. Make sure that an expansion gap is kept of at least 4mm to the walls as well as to all fixed components (doorframes, heating pipes etc.). In the case of room sizes over 10m x 10m, suitable expansion profiles must be inserted.

B. The boards are laid without glue/adhesive. Start to lay the floor in the left-hand corner of the room. The first board is aligned while observing the minimum distances to the wall. The second board and further boards are locked in place at the ends. While doing this, ensure that the long sides are not misaligned.

It is advisable to check this by placing a left-over piece alongside them. Further rows of

boards must be offset by at least 30cm to the short edge joints of the previous rows. Subsequent boards are locked together as described in **B** and are locked into place as a complete row in the grooves on the long sides of the boards in the previous row.

C. When cutting the last row of boards ensure a 4mm expansion gap is left. A pull bar will be needed to tap the boards into position. When complete, remove any spacers, cut any PE foil flush with the top of the boards and fit skirting boards or scotias. Ensure the skirting boards do not restrict the movement of the flooring.

D. Heating pipes and recesses must be sawn, cut or drilled into the elements for heating

pipes, taking the expansion spacing of 4mm into consideration. Rosettes are used for covering.

E. Wooden doorframes can be shortened. Take the necessary expansion spacing of at least 4mm under the doorframe into account. The elements' freedom of movement may not be impaired through shortening the frames. If doorframes are not shortened an expansion gap of at least 4mm is to be kept.

F. When laying in several rooms, separate the surfaces in the door or passage areas. These and the crossovers to other floor coverings must be covered using the suitable system profiles.

CAMARO™ LOC

FLOORING COLLECTION



POLYFLOR INTERNATIONAL

Australia

Polyflor Australia
Tel: +61 3 9215 4400
Tel: 1800 777 425
E-mail: sales@polyflor.com.au

Canada

Polyflor Canada Inc.
Tel: +1 905 364 3000
E-mail: sales@polyflor.ca

China

Polyflor Hong Kong
Tel: +(852) 2865 0101
E-mail: anthonylam@polyflor.com.hk

France

James Halstead France SAS
Tel: +33 (0) 8 20 20 32 11
E-mail: info@jhfrance.fr

Germany

objectflor Art und Design Belags GmbH
Tel: +49 (0) 2236 966 330
E-mail: info@objectflor.de

India

Polyflor India Pvt Ltd
Tel: +91 99 6757 0985
E-mail: info@polyflor.co.in

Ireland

Polyflor Ireland
Tel: +353 (1) 864 9304
E-mail: salesireland@polyflor.com

New Zealand

Polyflor New Zealand
Tel: +64 9 269 1111
Tel: 0800 765 935
E-mail: sales@polyflor.co.nz

Norway

Polyflor Nordic
Tel: +47 23 00 84 00
E-mail: firmapost@polyflor.no

Poland

Polflor Sp. Z o.o.
Tel: +48 (0) 61 820 3155
E-mail: polyflor@polflor.com.pl

Russia

Polyflor Contract Ltd
Tel: +7 (812) 332 42 02
E-mail: info@polyflor.ru

South Africa

Poly Sales Africa (Pty.) Ltd
Tel: +27 11 609 3500
E-mail: info@polyflor.co.za

Sweden

FalckDesign AB
Tel: +46 (0) 300 15820
E-mail: info@falckdesign.com

United Arab Emirates

Polyflor Middle East
Tel: +971 4 349 1078
E-mail: espm@eim.ae

www.polyflorathome.com



www.polyflor.com

POLYFLOR™ HEAD OFFICE

POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK

UK SALES DIRECT: +44 (0)161 767 1122

UK FAX: +44 (0)161 767 1128

RECEPTION: +44 (0)161 767 1111

UK SAMPLE REQUESTS: +44 (0)161 767 2551

EXPORT FAX: +44 (0)161 767 1166

E-MAIL: INFO@POLYFLOR.COM

EXPORT SALES DIRECT: +44 (0)161 767 1913

TECHNICAL SUPPORT: +44 (0)161 767 1912

WEBSITE: WWW.POLYFLOR.COM

POLYFLOR™
COVERING THE WORLD

James Halstead™
FLOORING

